Please read this manual first

## phone PX Setting Guide

Thank you for purchasing the "Qua phone PX" (simply called the "product" from here on)

This "Setting Guide" describes the basic operations and initial settings for using the product.

For descriptions on various functions, refer to "Basic Manual" or "User Guide 取扱説明書 詳細版 (Full Instruction Manual)" (Japanese) on the au website. Before using the product, be sure to read the "Notes on Usage" to ensure correct and safe use.

All other company names and product names are registered trademarks or trademarks of respective companies referred to in this manual

The ® marks and TM marks may be omitted in this manual

Sold by: KDDI CORPORATION, OKINAWA CELLULAR TELEPHONE COMPANY

Imported by: LG Electronics Japan, Inc.

Manufactured by: LG Electronics Inc.

MBM65490401(1.0) May 2016, 1st Edition

Learning the Basic Operations

Describes the names of parts and operation.

Described in the steps for the following:

· Language settings, Accessibility · Wireless LAN (Wi-Fi®) settings

 Google account settings Other settings

au Easy Setting Sets au ID and services.

E-mail Settings Sets up to use e-mail (@ezweb.

You can also make a call using call logs or contacts.

Initial Settings

the au Settings Menu You can restore/backup data this product using a microSD

memory card or au servers. Reducing Battery Consumption

Battery saver

Making a call

Receiving a call You can also receive a call in sleep mode.

Transferring Contacts You can transfer your contacts data from your previous au phone.

How to Transfer Data from from your previous au phone to

You can reduce the battery

consumption by setting up

immediately release your finger. Tapping

your finger to operate

Unlocking the screen

Swipe on the lock screen

· o o —

#### Tap/Double Tap Lightly touch an icon or item and then

Basic operations of the touch panel

the same place twice

is called a double tap

Learning the Basic Operations

Power key (side)

off1 → [POWER OFF].

Cancel sleep mode

Display (Touch panel)

Use it to display the Home screen.

Check running applications.

Returns to the previous screen

screen to operate.

O Home button

☐ Task button

< Back button

The display of the product is a touch panel and you can touch directly with

Press and hold the power key

Press and hold the power key → Select [Power

Press the power key in operation to switch to

Press the power key in sleep mode to display the

Directly touch an item or button displayed on the

Touch and hold

Confirm the contents -

[I AGREE]

Keep touching the

Power ON

●Power OFF

Sleep mode


sleep mode.

Basic operations of the kevs

#### Basic operations to input characters

This product uses the software keyboard displayed at the bottom of the screen to enter characters.

Tap the keys on the screen to enter characters.



characters.

1 2 3 4 5 6 7 8 9 0 SDFGHJKL ZXCVBNM M • ♣ - ., • • 🕒 **《QWERTY》** 

\$ 12345 67890 **6** KLMNO PQRS UVWXYZ,.

3 Enters pictograms/symbols/emoticons. 4 Switches the Input Mode.

Touch and hold → tap [Keyboard type] to switch to a QWERTY keyboard or 50-key keyboard. (5) Switches upper case/lower case of entering

character

⑥ Inputs the characters of each key.

7 Deletes the character to the left of the cursor. (8) Inputs a space and converts characters in Hiragana-Kanji input mode.

9 Start a new line/confirm the characters input.

## Flick input JKL MNO

**(50-key)** 

You can flick the key up, down, right, or left to enter a character. Touch and hold the key to display the candidates that can be entered by flicking (flick guide).

Flick guide

PQRS TUV WXYZ

aA1 A⇔a ; .,?!



#### Flick (Swipe)

Quickly move (flicking) your finger up, down, right, or left.

#### How to read the notification panel

When a notification icon appears on the left side of the status bar, slide the status bar down to open the notification panel to check the notification or launch the application.



Slide down the status bar

#### Setting Application Authority

When activating the applications/functions to access the functions or information of the product for the first time, the confirmation screen appears to request the permission for the access authority.

When the confirmation screen appears, confirm the content and tap "DENY" or "ALLOW".

• The explanation screen may be displayed depending on the application/ function. Also, the confirmation screen may be displayed several times or the display may be different. Carefully check the displayed content, follow the onscreen instructions. If the application authority is not allowed, applications/functions may not

be activated or using functions may be restricted.

• In this manual, description of the confirmation screens may be omitted.



Keep touching items

#### Initial Settings: STEP1

turn on the power for the first time.

ようこそ

日本語 (日本)

○ 知念書報

Once you select your desired

language, the language for

the initial settings screen also

changes. From here on, follow the

[日本語(日本)] → select

onscreen instructions.

language → [→]

#### Setting the language, accessibility

This section describes the initial settings screen that appears when you

Setting the language Setting up Accessibility

# Welcome

After switching to the English display.

[Accessibility] → review the precautions, [YES] → set Accessibility → [<1] → [→1]

\* The operations herein differ depending on the configured

%. Emergency call

### Initial Settings: STEP2 Setting Wireless LAN (Wi-Fi®)

By using the wireless LAN (Wi-Fi®) function, you can access to the Internet using a wireless LAN environment built in your home or a public wireless LAN environment away from home.

When setting the wireless LAN (Wi-Fi®) as described in this guide, you need to be in an environment where the radio waves can be received from

the wireless LAN device or public wireless LAN that you want to access Check the following information before setting the wireless LAN (Wi-Fi®)

function. The name set for the wireless LAN device or public wireless LAN service that you are connecting to

The password for connecting to the wireless LAN device or public wireless LAN service

\* Connection to all public wireless LAN services is not guaranteed. \* You may need a separate contract with a service provider to use some

nublic wireless LAN services. Enabling the wireless LAN (Wi-Fi®) function uses a lot of battery power.

We recommend turning off the wireless LAN (Wi-Fi®) function when no



[ ] of "WI-Fi" → tap the network that you are connecting to



[CONNECT] → confirm the connection → [NEXT]

#### Initial Settings: STEP3

#### Setting up Google account

You can use online services provided by Google, such as Gmail and Google Play, by setting up a Google account.

This section describes how to set up an account on the initial settings screen that appears when you turn on the power for the first time. User name Register your Google account (user ID) and the characters that you want to use as your mail address

Password

Register password for the Google account.



 $[No thanks] \rightarrow [NEXT]$ To copy the settings of an Android device to the product, tap [Copy your Google Accounts, apps, and



Keep me up to date with new and offers from Google Play.

[Or create a new account]




Check the details of



If you have a Google account, enter the mail address.



Google services → [NEXT]



Enter your first and last names → [NEXT] → enter

[VERIFY] vour user name → [NEXT] → enter your password ¬ [NEXT]

' User names already being used by another user cannot be used

Confirm your phone

number → [NEXT] →



[No thanks] → [CONTINUE] \* If you are purchasing applications from Google Play, enter payment

Set whether to protect the smartphone

\* To set the screen lock, place a check mark on "Protect this device and reaquire a PIN, pattern, or passward to unlock the screen" — [NEXT] — set the unlock method of the lock screen, etc.  $\rightarrow$  tap [OK]. If you do not set up, clear the check mark on "Protect this device

and reaguire a PIN. pattern, or passward to unlock the screen" tap [SKIP] → [SKIP ANYWAY].

Other settings

Initial Settings: STEP4



Check legal documents → place check marks on "I agree" and "I agree

(Optional)" → [DONE]

## au Easy Setting

You can setup convenient au functions and services.

The settings can be changed with the "au ID Setting" application.

After completing initial settings, you can also setup au services on the Home screen by tapping [基本機能 (Basic functions)] → [Settings] → [au Settings Menu] → [au Easy Setting].



[Register "au ID"] → [Next]

Backup on 1.



Confirm the terms of use →  $[Agree] \rightarrow [Next] \rightarrow [Agree]$ f If you selected [Disagree], the au Fasy Setting Completed screen will appear.



Confirm the details and select [Turn Auto Backup on]/[Turn Auto Backup off] → [Next] If you want to use the "Data backup" application to

activation1 → [Next]. automatically backup your photos and contacts to the au Smart Pass server, select [Turn Auto

or icons and trace to the desired position.

\* If you do not set up, tap



This step is not required i you select a wireless LAN (Wi-Fi®) network without security settings.

## Setting au ID

This section describes how to set up an au ID on the initial settings screen that appears when you turn on the power for the first time.

Register your au phone number or any other character string as an au ID.

Register password for using au ID. au ID password \* The same "au ID" as another user's cannot be registered.





When using Texting While Walking Alert App, [Activate] → [Next] If you do not use it. tap (Skip

[au IDの設定・保存 (Set and



Enter the security code →

[OK]

[Activate] → [Next] \* If you do not use it, tap [Skip activation] → [Next] Allowing each authority of

pre-configuration.

Lookout for au completes the



ID SCHOOLSE

ければ (現実) きタップしておすすみく;

Enter a security password

→ 「設定 (Settings)]

data you want to restore -[次へ (Next)] If there is no data to be restored, this screen will not be

displayed.





Place checkmarks on the

application to be installed → [次へ (Next)]







the above appears, follow the

\* When a different screen from



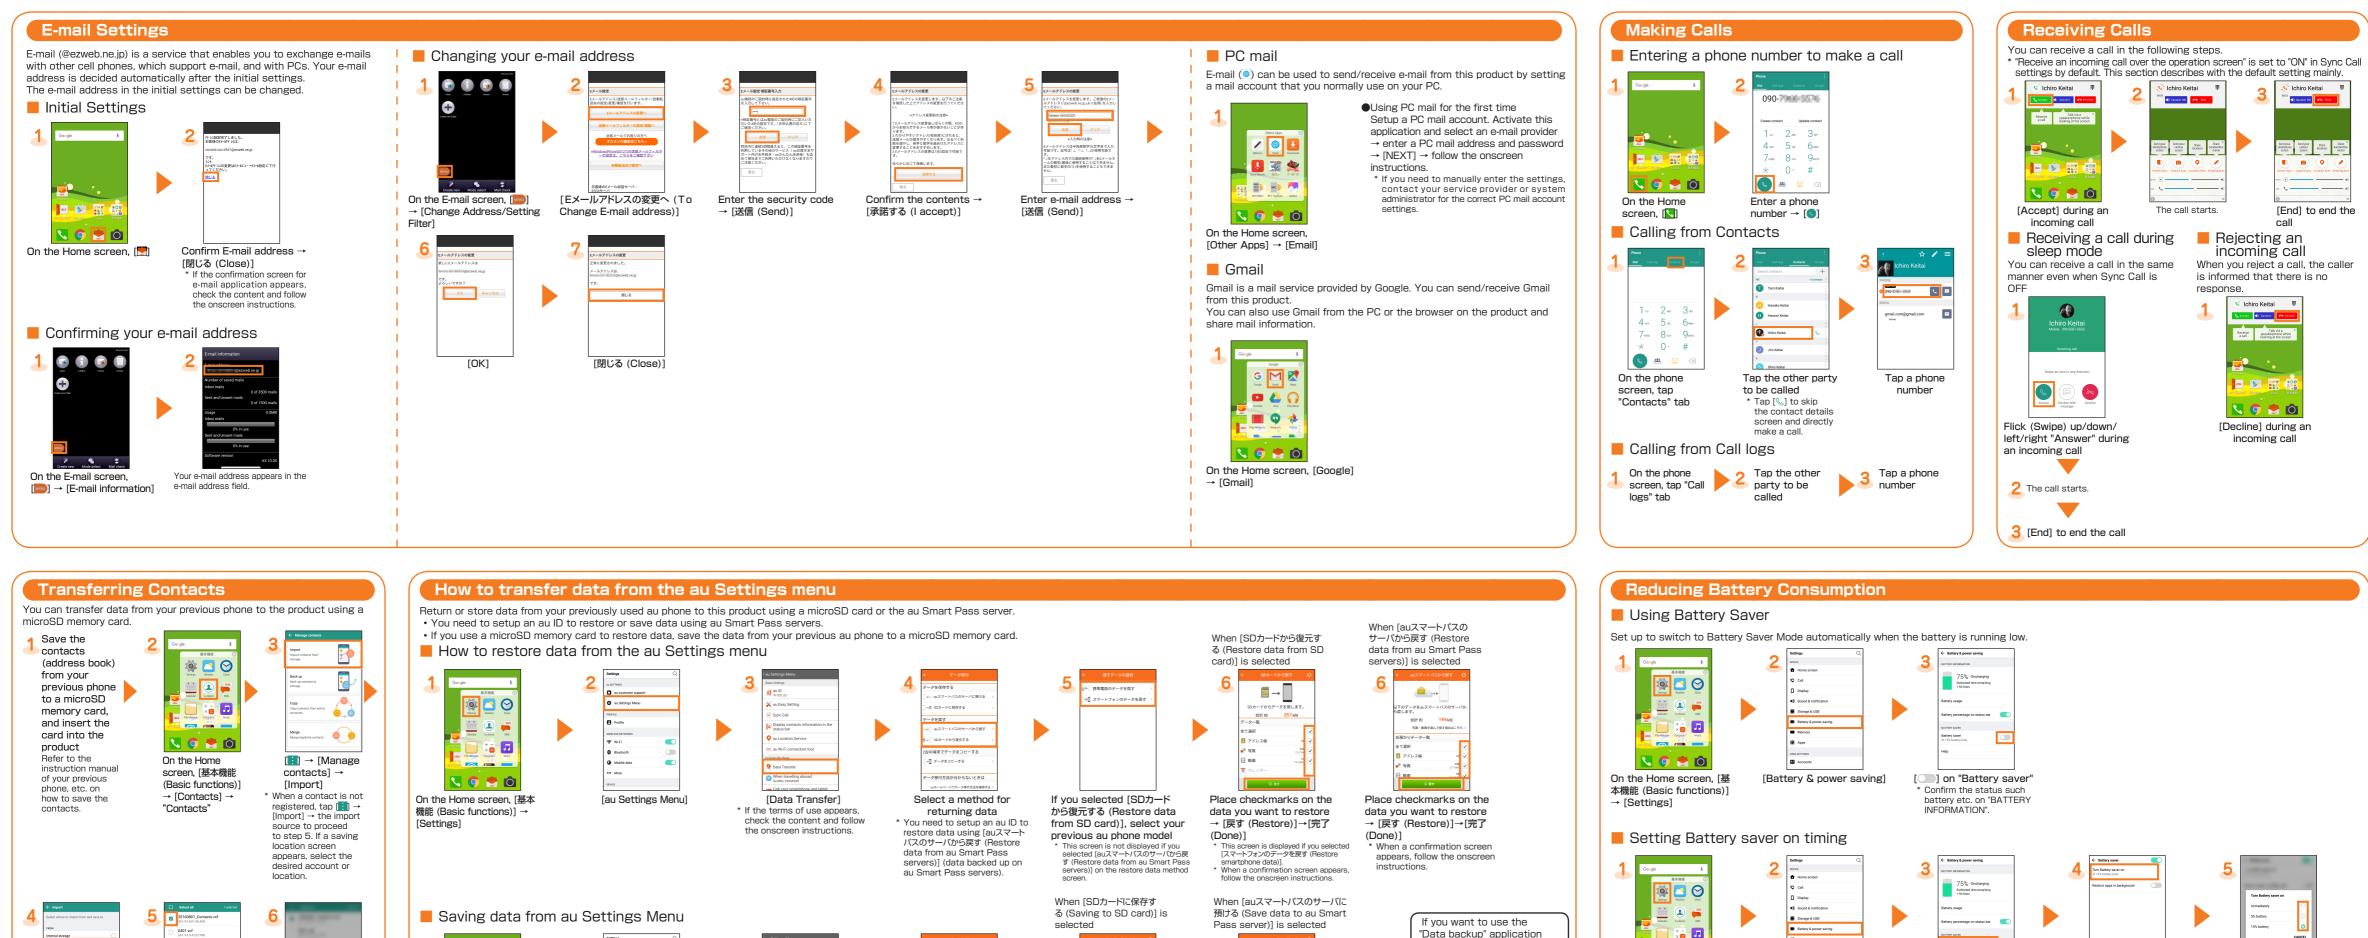

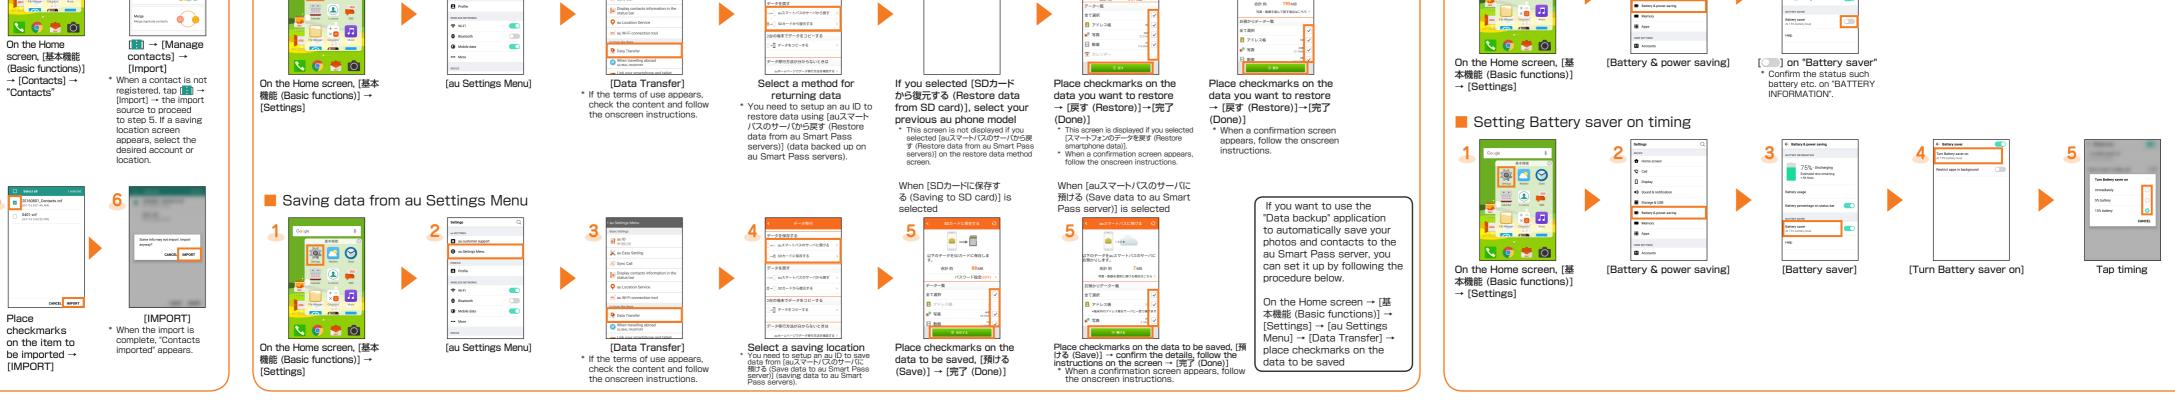

[SD card] →

If a saving location

account or location.

screen appears.

[OK]

Place