Introduction

Qua phone

Setting Guide

Thank you for buying the "Qua phone" (simply called the "product" from here on). In this guide, settings and precautions for using the product are described.

For explanations of basic functions, refer to "Basic Manual"

Company names and product names referred to in this manual are trademarks or registered trademarks of respective companies. The TM, ® marks may be omitted in this manual.

Illustrations/screens shown in this manual may look different from the actual product/screens. In some cases, minor details or a part of a screen may be omitted.

December 2015, 1st Edition


Basic Operation Initial settings Make initial settings when you turn the power on for the first time. au Easy Setting Set au ID E-mail Make initial settings for E-mail (@ezweb.ne.jp) etc Making a call Add a new contact to Contacts to call. Receiving a call Setting Wi-Fi® Describes how to connect Wi-Fi® network Viewing/playing data Describes how to view/play still images or video data. Saving battery power Describes the setting to save battery consumption using "Eco Mode" Transferring data from au Settings Menu Restore/back up data from/to your previously used au phone to/

from this product using microSD card or the au Smart Pass

Sold by: KDDI CORPORATION • OKINAWA CELLULAR TELEPHONE COMPANY Manufactured by: KYOCERA Corporation

Basic Operation

For explanations of basic functions, refer to "Basic Manual".

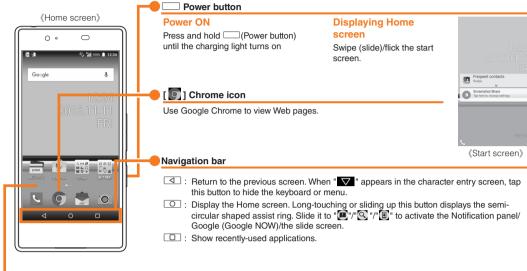

Touch directly with your finger to operate

Display

Lightly touch a screen and then immediately release your finger







Slide (Swipe) While lightly touching the screen, trace to the desired direction.



Touch the screen and flick up/down/ left/right.

Flick



ON

OFF

Character entry

Use flick input or tap a key several times to enter characters.

Tap a key to display enterable characters as shown in the right. Flick to the direction of the character to enter.



OFF

OFF

mode switch key Tap to switch character type

《Character size

Check the contents

then [NEXT]

Character entry

Magnifying characters To magnify characters of menu items etc. operate as follows.

Home screen → [基本機能 (Basic function)] → [Settings] →

 $[\textbf{Accessibility}] \rightarrow \textbf{Turn "Large text" to ON}$

changed》 • Alternatively, from Home screen → [基本機能 (Basic function)] → [Settings] → [Accessibility] → [Magnification gestures] to magnify the screen. For operation method, see the description on the screen.

Initial settings

When you turn on the product for the first time after purchasing the product, follow the onscreen instructions to set language, functions and services.

Setting up Google account

Set up Google account to use Google applications such as "Gmail", "Play Store", "Hangouts". Setting items are as below (besides the items below, register "First" name and "Last" name).

Register your Google account (user ID) and a character string for mail address. You can register a desired User name name, but a name already registered by another user cannot be set. **Password** Register password for the Google account.







*1 Text message for Google verification code will be sent to the set phone number.

Changing display language via Settings menu

Home screen → [基本機能 (Basic function)] → [設定 (Settings)] → [言語と入力 (Language & input)] → [言語 (Language)] → Select "English" → [OK]


au Easy Setting

By setting au ID, you can use various services provided by au such as "au Kantan Kessai" which allows you to purchase applications from the auスマートパス (au Smart Pass) or Google Play. Main setting items are as follows.

au ID Register your au phone number or a character string for au ID (user ID). au ID password Register password for using au ID.

"au ID" which is already used by another user cannot be set.

• If you skip the operation of "au Easy Setting" at that time, you can set au ID later. In that case, operate from Home screen → [基本機能 (Basic function)] → [Settings] → [au Settings Menu] → [au Easy Setting], or from Home screen → [au $\supset_{\mathcal{I}}$ \mathcal{I} \mathcal



Enter the security code → [OK] Default value is a fourdigit number written at

To back up photos and

Auto Backup on"

contacts to au Smart Pass automatically using "Data Storage App", tap "Turn



password → [設定 (Settings)] → [終了 (Exit)] subscription.

おすすめアプリ

おすすめアプリの一覧です。選択した 自動でインストールされます。

回る コスマートバス コスマートフェンを達しむための。おうりで おしん 最後情報をデェックしましょう。

● ビデオバス 「セデオバス」は、月間55公子別刊前(明末期 poss # フラン)で報告・ドラマ・アニメが用意用!

Select apps to install

→ [次へ (Next)]

If there are apps

screen appears. Follow the onscreen instructions.

of customer

information for "About use

"Accept".


explanation screen


for E-mail function

appears. Confirm

to be restored, the

restoration of apps

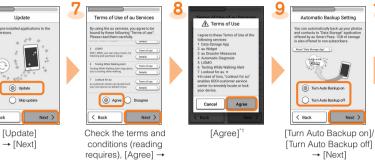




[Next]

E-mail


To use E-mail (@ezweb.ne.jp), subscription to LTE NET is required.

If you did not subscribe it when you purchased the product, contact an au shop or Customer Service Center. Your E-mail address is determined automatically after initial setting. You can change the E-mail address later.

Initial settings

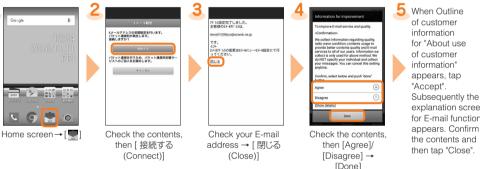

Changing your e-mail address

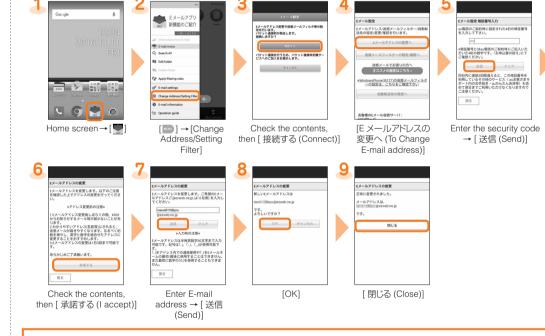



Home screen \rightarrow [\blacksquare] \rightarrow [MENU] \rightarrow [E-mail information]

Backing up E-mail You can back up E-mail.

Backed up data is saved on a microSD memory card (/SD card/private/au/email/BU/) when a microSD memory card is attached. If a microSD memory card is not attached, data is saved on the internal storage (/Internal storage/private/au/email/BU/).





→ [OK]

Setting other than E-mail

You can use mail addresses except for E-mail (@ezweb.ne.jp). You need to set up an account to use it. For the first time use, make settings as follows.

Home screen → [Google] → [Gmail] → Follow the onscreen instructions.

Making a call

Adding new contact and making a call



Making a call from the call history



Checking your own phone number (Profile)

Home screen → [基本機能 (Basic function)] → [Settings] → [Profile]

Profile screen appears. If you have done the initial settings for "E-mail" app, your e-mail address is displayed.

Receiving a call

You can receive a call in the following steps.

The incoming screen differs from the one in sleep mode or while the start screen is displayed. "Receive an incoming call over the operation screen" is set to "ON" in "Sync Call settings" by default. When you set it "OFF", follow the onscreen

Calling

Example: When a call is received while Home screen is displayed




Example: When a call is received in sleep mode or while the start screen is displayed



Answering with Auto answering

Answer by the answering memo message and record a message of the party when you cannot answer calls.

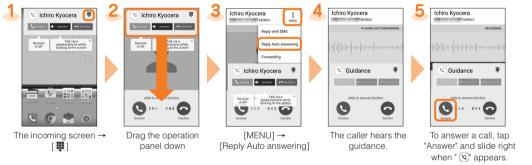

Setting Wi-Fi

Use your home Wireless LAN (Wi-Fi®) or public wireless LAN to connect to the Internet. Main settings are as follows.

Wi-Fi Easy Settings Answer to the questions on the screen or follow the instructions to register an access point easily. WPS system Use for registration of access point compatible with Wi-Fi Protected Setup ™ with WPS mark.





→ [Settings]

Available Wi-Fi® networks are listed. Select a Wi-Fi® network to connect → Enter a password as required → [CONNECT] to connect the Wi-Fi® network If a Wi-Fi® network you want to connect cannot be detected, operate from [] → [Add network] and connect the Wi-Fi® network manually.

Using Wi-Fi Easy Settings



[Wi-Fi Easy Settings]

on the screen and follow the instructions to register an access point.

Using WPS system access point



For using WPS button, tap "WPS Push Button" and then keep pressing WPS button of access point to set to WPS mode. An access point is automatically detected and registration starts. For entering WPS PIN, tap "WPS Pin Entry" and enter displayed PIN code for access point, then registration starts.

[Advanced] → [WPS Push Button]/[WPS Pin Entry]

Viewing/playing data

By transferring data from the previously used au phone to a microSD memory card, you can view/play still image or movie data using "File Commander" in the product. When you activate for the first time, the Terms and Conditions appears. Follow the

Copyrighted data on the previously used au phone cannot be transferred to the product. However, some Chaku Uta Full, Video Clip, Chaku Uta Full sferred and played on the product with the same phone number by backing up with LISMO Port Ver 4.2 or late



displayed → Tap data

Data is played.

→ [File Commander] Saving battery power

機能 (Basic function)]

Use "Eco Mode" to set sleep time of backlight, screen brightness, etc. so that you can save the battery power. When the battery power is low, set "Data communication" to "OFF" and limit communications only for calling to extend standby time.



Transferring data from au Settings Menu

Restore/back up data from/to your previously used au phone to/from this product using microSD card or the au Smart Pass server.

When "SD カード

 Setting au ID is required for restoring/backing up data using au Smart Pass server · For restoring data using microSD memory card, save the data to the microSD memory card using your previously used au phone in advance.



Restoring data from au Settings Menu



Setting au ID is is selected, select a type required for restoring data from "au スマート of your previously used au cell phone パスから戻す (Restore Not appeared when "au スマートパスから戻す from au Smart Pass)" (Restore from au Smart

[完了 (Done)] It is the screen for selecting "スマート フォンのデータを戻 ਰ (Restore data from smartphone)". Pass)" is selected in

→ [完了 (Done)]

When "au スマートパ



[保存する (Save)] →

[完了 (Done)]

Setting au ID is required for saving data from "au スマー トパスに預ける (Back up to au Smart Pass) back up → [預ける (Back up)] → [OK] → [完了 (Done)]

Using "Data Storage" App

To use "Data Storage" app to back up photos and contacts to au Smart Pass server automatically, set as follows. Home screen → [基本機能 (Basic function)] → [Settings] → [au Settings Menu] → [Backup Setting] → Tap to turn on " 定期的に自動で預ける (Back up periodically)'